

User Manual of LK-BE988AO-FPAW
AUO Panel M190EG01 V3

19"KioskLine

With Projective Capacitive Touch



Date: 27.01.2013

Version: 1.1

Prepare by:

Check by:

REVISION HISTORY

Version	Date	Page	Section	Description
1.0	2011/02/06	ALL	ALL	New Release
1.1	2013/27/01	ALL	ALL	Overall update

TABLE OF CONTENTS

1.	<u>SAFETY SYMBOLS & PRECAUTIONS</u>	4
1.1.	<u>SAFETY SYMBOLS</u>	4
1.2.	<u>PRECAUTIONS</u>	4
2.	<u>INTRODUCTION</u>	7
2.1.	<u>Features</u>	7
2.2.	<u>Package Contents</u>	7
3.	<u>CABLE CONNECTION</u>	8
3.1.	<u>Before Connecting</u>	8
3.2.	<u>Connecting the Cables</u>	8
4.	<u>ADJUSTMENT</u>	9
4.1.	<u>How to Use OSD Menu</u>	9
4.2.	<u>OSD MENU Adjustments and Settings</u>	10
4.3.	<u>Screen Adjustment</u>	10
5.	<u>TROUBLESHOOTING</u>	11
6.	<u>CLEANING</u>	12
7.	<u>SPECIFICATION</u>	13
7.1.	<u>Specification</u>	13
7.2.	<u>DVI(Digital Visual Interface) Connector</u>	14
7.3.	<u>D-Sub 15pin Connector</u>	14
7.4.	<u>Preset Timing</u>	14
8.	<u>GUARANTEE EXCLUSION</u>	15
9.	<u>VENDOR</u>	15

1. SAFETY SYMBOLS & PRECAUTIONS

1.1. SAFETY SYMBOLS

This manual uses the safety symbols below. They denote critical information. Please read them carefully.

	WARNING Failure to abide by the information in a WARNING may result in serious injury and can be life threatening.
	CAUTION Failure to abide by the information in a CAUTION may result in moderate injury and/or property or product damage.
	Alert electrical hazard.
	Indicates a prohibited action.
	Indicates to ground for safety.

1.2. PRECAUTIONS

To ensure personal safety and proper maintenance, please read this section and the caution statements on the unit

WARNING

If the unit begins to emit smoke, smells like something is burning, or makes strange noises, disconnect all power connections immediately and contact your dealer for advice.

Attempting to use a malfunctioning unit may result in fire, electric shock, or equipment damage.

Do not open the cabinet or modify the unit.

Opening the cabinet or modifying the unit may result in fire, electric shock, or burn.




Refer all servicing to qualified service personnel.

Do not attempt to service this product yourself as opening or removing covers may result in fire, electric shock, or equipment damage.

Keep small objects or liquids away from the unit.


Small objects accidentally falling through the ventilation slots into the cabinet or spillage into the cabinet may result in fire, electric shock, or equipment damage. If an object or liquid falls/spills into the cabinet, unplug the unit immediately. Have the unit checked by a qualified service engineer before using it again.



Set the unit in an appropriate location.

Not doing so may result in fire, electric shock, or equipment damage.

- Do not place outdoors.
- Do not place in the transportation system (ship, aircraft, trains, automobiles, etc).
- Do not place in a dusty or humid environment.
- Do not place in a location where the steam comes directly on the screen.
- Do not place near heat generating devices or a humidifier.
- Do not place in an inflammable gas environment.



To avoid danger of suffocation, keep the plastic packing bags away from babies and children.

Use the enclosed power cord and connect to the standard power outlet of your country.

Be sure to remain within the rated voltage of the power cord. Not doing so may result in fire or electric shock.

To disconnect the power cord, grasp the plug firmly and pull.

Tugging on the cord may damage and result in fire or electric shock.



The equipment must be connected to a grounded main outlet.

Not doing so may result in fire or electric shock.



Use the correct voltage.

- The unit is designed for use with a specific voltage only. Connection to another voltage than specified in this User's Manual may cause fire, electric shock, or equipment damage.
- Do not overload your power circuit, as this may result in fire or electric shock.

Handle the power cord with care.

- The unit is designed for use with a specific voltage only. Connection to another voltage than specified in this User's Manual may cause fire, electric shock, or equipment damage.
- Do not overload your power circuit, as this may result in fire or electric shock.



Never touch the plug and power cord if it begins to thunder.

Touching them may result in electric shock.



Do not touch a damaged LCD panel directly with bare hands.

The liquid crystal that may leak from the panel is poisonous if it enters the eyes or mouth. If any part of the skin or body comes in direct contact with the panel, please wash thoroughly. If some physical symptoms result, please consult your doctor.



Follow local regulation or laws for safe disposal.




CAUTION

Handle with care when carrying the unit.

Disconnect the power cord and signal cables and remove the optional unit. Moving the unit with the cord or the option attached is dangerous. It may result in injury.

When handling the unit, grip the bottom of the unit firmly with both hands ensuring the panel faces outward before lifting.

Dropping the unit may result in injury or equipment damage.



Do not block the ventilation slots on the cabinet.

- Do not place any objects on the ventilation slots.
- Do not install the unit in a closed space.
- Do not use the unit laid down or upside down.
- Blocking the ventilation slots prevents proper airflow and may result in fire, electric shock, or equipment damage.



Do not touch the plug with wet hands.

Doing so may result in electric shock.



Use an easily accessible power outlet.

This will ensure that you can disconnect the power quickly in case of a problem.

Periodically clean the area around the plug.

Dust, water, or oil on the plug may result in fire.

Unplug the unit before cleaning it.

Cleaning the unit while it is plugged into a power outlet may result in electric shock.

If you plan to leave the unit unused for an extended period, disconnect the power cord from the wall socket after turning off the power switch for the safety and the power conservation.

LCD PANEL

When the monitor is cold and brought into a room or the room temperature goes up quickly, dew condensation may occur inside and outside the monitor. In that case, do not turn the monitor on and wait until dew condensation disappears, otherwise it may cause some damages to it.

In order to suppress the luminosity change by long-term use and to maintain the stable luminosity, please use the monitor with the lower brightness.

The screen may have defective pixels. These pixels may appear as slightly light or dark area on the screen. This is due to the characteristics of the panel itself, and not the product.

The backlight of the LCD panel has a fixed life span. When the screen becomes dark or begins to flicker, please contact your dealer.

Do not press on the panel or edge of the frame strongly, as this may result in damage to the screen. There will be prints left on the screen if the pressed image is dark or black. If pressure is repeatedly applied to the screen, it may deteriorate or damage your LCD panel. Leave the screen white to decrease the prints.

Do not scratch or press on the panel with any sharp objects, such as a pencil or pen as this may result in damage to the panel. Do not attempt to brush with tissues as this may scratch the LCD panel.

When the screen image is changed after displaying the same image for extended periods of time, an afterimage may appear. Use the screen saver or timer to avoid displaying the same image for extended periods of time.

2. INTRODUCTION

Thank you very much for choosing this monitor.

2.1. Features

- VGA analog input
- DVI digital input
- Resolutions up to 1280x1024.
- Power management system conforms to VESA DPMS standard.
- Supports DDC1/2B for Plug & Play compatibility.
- Advanced On Screen Display (OSD) control for picture quality adjustment

2.2. Package Contents

Please contact your local dealer for assistance if any of the listed items are missing or damaged.

- LCD Monitor
- D-sub Cable
- DVI Cable
- Power Cable
- USB Cable
- User Manual
- Touch drive CD
- M4 nut
- Locking plate

Note: Please retain the packing materials for future transference.

3. CABLE CONNECTION

3.1. Before Connecting


Before connecting your monitor to the computer, change the display screen settings (Resolution and frequency) in accordance with the charts below.

Note:

- The lower display modes like 640x480, automatically enlarge to the maximum display mode (1280x1024), and some lines of the characters may become fuzzy.
- When your computer and display support VESA DDC, the suitable resolution and the refresh rate are set by just plugging your display into the computer without any manual settings.

3.2. Connecting the Cables

Note: Be sure that the power switches of both the computer and the monitor are OFF.

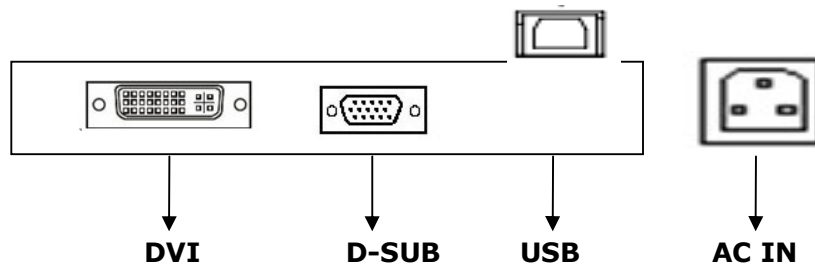

USB cable connection:

Plug the USB cable to the USB connector in the rear of the PC system, and plug the other end to the monitor;

DVI cable connection:

Plug the DVI signal cable to the DVI connector in the rear of the PC system, and plug the other end to the monitor. Secure cable connectors with screws.

VGA cable connection:

Plug 15-pin VGA signal cable to the VGA connector in the rear of the PC system, and plug the other end to the monitor. Secure cable connectors with screws.

Power cable connection:

1. Connect the power cord to the AC input on the rear of the monitor.
2. Plug the power cord into the AC Plug, and plug the other end of the cord into a power outlet

4. ADJUSTMENT

This monitor will not likely require adjustment. Variations in video output and application may require adjustments to the monitor to optimize the quality of the display.

For best performance, the monitor should be operating in native resolution 1280 x 1024. Use the Display control panel in Windows to choose 1280 x 1024 resolution. Operating in other resolutions will degrade video performance.

All control adjustments are automatically memorized.

4.1. How to Use OSD Menu



(1) **Auto** (Auto adjustment or exit OSD menu)

(2)  (Down or Increase value)

(3)  (Up or Decrease value)

(4) **Menu** (Activate OSD menu)

(5) **Power** (Power on/off)

(6) Power indicator LED

Power indicator LED

Green	Operating
Orange	Closed
Off	Power Off

1. Entering the OSD Menu

Press the MENU Button once to display the OSD Menu.

2. Making Adjustments and Settings

a. Select the desired sub menu icon using the Control buttons and press the MENU button. The sub menu appears.

b. Use the Control buttons to select the desired setting icon and press the MENU button. The setting menu appears.

c. Use the Control buttons to make all required adjustments and press the MENU button to save the settings.

3. Exiting the OSD MENU

- To return to the main menu, select the <return> icon and press MENU button
- To exit the OSD menu, Press <Exit> button.

4.2. OSD MENU Adjustments and Settings

The following table shows all adjustment and setting menus.

Main Menu	Sub Menu	Reference
Gamma	Gamma 1	Choose suitable mode according to different application
	Gamma 2	
	Gamma 3	
	Gamma 4	
	Gamma 5	
	Gamma 6	
	Gamma 7	
Color Temp	9300	Choose suitable color temp according to different application
	6500	
	User	
Language	English	Select display language
	Chinese	
Signal	D-SUB	Select input Signal
	DVI	
Default		Reset to the default value
Auto Adjust		
Exit		Close the OSD menu

4.3. Screen Adjustment

Screen adjustments for the monitor should be used in suppressing screen flickering and also for adjusting the screen to its proper position. There is only one correct position for each display mode. It is also recommended to use the OSD Menu function when first installing the display or whenever changing the system.

Note: Allow the monitor to stabilize for at least 20 minutes before making image adjustments.

Making adjustment must be **VGA** signal.

Adjustment Procedure

1. Adjust by <Auto Adjust> menu in the OSD Menu or using shortcut key "AUTO" with 3 seconds

To automatically adjust the clock, phase, screen position.

Making adjustment must be VGA signal.

Note:

The Auto sizing function is intended for use on the computer running Windows. It may not work properly when the computer is running on MS-DOS (Not windows) or the background color for the "wall paper" or "desktop" pattern is set to black.

5. TROUBLESHOOTING

If a problem persists even after applying the suggested remedies, contact a dealer.

Problems	Points to check with Possible Solutions
1. No picture Indicator status: Off	Check that the power cord is correctly connected. If the problem persists, turn off the monitor power for a few minutes, then turn it back on and try again. - when the signal is not inputted correctly, even if the monitor functions properly. - When the image is displayed correctly after a short time, there is no problem with the monitor. (Some PCs do not output the signal soon after powering on.) Check that the signal cable is properly connected to the PC or graphics board.
Indicator status: Green	Check the "Brightness" setting.
2. Display position is incorrect. 	Adjust the image position or decrease the horizontal or vertical bars using the <Auto Adjust> menu. If the problem persists, use the graphics board's utility software to change the display position if available.
3. Vertical bars of distortion appear. 	
4. Horizontal bars of distortion appear. 	
5. The screen is too bright or too dark.	Adjust the <Brightness> (The backlight of the LCD monitor has a fixed life span. When the screen becomes dark or begins to flicker, please contact your dealer.)
6. Afterimages appear.	- Use the screen saver or timer when displaying the same image for extended periods of time. - Afterimages are particular to LCD monitors. Avoid displaying the same image for extended periods of time.
7. The screen has defective pixels (e.g. slightly light or dark).	This is due to the characteristics of the panel itself, and not the LCD product.

6. CLEANING

Periodic cleaning is recommended to keep the monitor looking new and to prolong its operation lifetime.

Note: Never use thinner, benzene, alcohol (ethanol, methanol, or isopropyl alcohol), abrasive cleaners, or other strong solvents, as these may cause damage to the cabinet or LCD panel.

Cabinet

To remove stains, wipe the cabinet with a soft, lightly moistened cloth using a mild detergent. Do not spray wax or cleaner directly into the cabinet. (For details, refer to the manual of the PC.)

LCD Panel

The LCD surface can be cleaned with a soft cloth, such as cotton or lens paper. If necessary, stubborn stains can be removed by moistening part of a cloth with water to enhance its cleaning power.

7. SPECIFICATION

7.1. Specification

Display characteristics	
Size:	19"
Supported color :	16.7M colors
Native resolution:	1280x1024
Pixel pitch:	0.294mm x 0.294mm
Viewing angle:	178°H/V Typ.
Brightness:	250cd/m ² Typ.
Contrast ratio:	1300:1 Typ.
Response time:	8 ms Typ.
Physical specifications	
Standard mounting:	VESA compatible (100 mm spacing)
Power supply:	DC 12V 6A
Power consumption:	38W max.
Power saving:	EPA,VESA compliant
Operating temperature:	0° to 40° C
Storage temperature:	-20° to 60° C
Relative humidity:	10% to 90%,non condensing
MTBF	>50,000 hours(excluding backlight)
External connections	
Digital signal:	DVI-D
Analog signal	D-Sub 15 PIN


7.2. DVI(Digital Visual Interface) Connector



Pin	Signal	Description	Pin	Signal	Description
1	TX2-	Channel 2 Data -	13	TX3+	NC
2	TX2+	Channel 2 Data +	14	+5V	+5 V from input
3	SHLD2/4	Channels 2 and 4 Shield	15	5V_GND	Ground for +5 V
4	TX4-	NC	16	HPD	Hot Plug Detection
5	TX4+	NC	17	TX0-	Channel 0 Data -
6	SCL	DDC Clock	18	TX0+	Channel 0 Data +
7	SDA	DDC Data (bidirectional)	19	SHLD0/5	Channels 0 and 5 Shield
8	VSYN	NC	20	TX5-	NC
9	TX1-	Channel 1 Data -	21	TX5+	NC
10	TX1+	Channel 1 Data +	22	SCL_GND	DDC Clock Ground
11	SHLD1/3	Channels 1 and 3 Shield	23	TXC+	Clock +
12	TX3-	NC	24	TXC-	Clock -
Pin	Code	Analogue Function	Pin	Code	Analogue Function
C1	R	NC	C4	HSYN	NC
C2	G	NC	C5	ANL_GND	Ground
C3	B	NC			

Note: This connector only supports the DVI-D signal.

7.3. D-Sub 15pin Connector



Pin	Signal	Pin	Signal	Pin	Signal
1	Red video	6	Red ground	11	Ground Shorted
2	Green video	7	Green ground	12	Data (SDA)
3	Blue video	8	Blue ground	13	H. Sync
4	Ground	9	5V	14	V. Sync
5	GND	10	Ground Shorted	15	Clock (SCL)

7.4. Preset Timing

Mode		Pixel Clk MHz	polarity		Frequency	
			H	V	FH (kHz)	FV (Hz)
VGA	640 x 480	25.2	-	-	31.5	60.0
VESA	800 x 600	40.000	+	+	37.9	60.3
VESA	1024 x 768	65.000	-	-	48.4	60.0
VESA	1280 x 1024	108.000	+	+	64.0	60.0

8. GUARANTEE EXCLUSION

Claims for defects do not exist in the following cases:

- Natural wear and tear, and any damage, errors, reduced output or changes in the condition or function of our products that are due to external factors (e.g. blows, knocks, vibrations, water, fire), or due to improper storage, handling, assembly or any other improper use, or due to extreme climatic conditions, or to particular reception or operating conditions at the location where the item is used;
- Defects due to constructional errors or material defects, insofar as the customer has prescribed the construction or the material;
- Burn-in on the LCD panel caused by permanent display and spots forming on the LCD panel

9. VENDOR

Europe:

Canvys
A Division of Richardson Electronics GmbH
Raiffeisenstraße 5
D-78166 Donaueschingen

Internet: www.canvys.com
Tel.: +49 (0) 771 83 00 – 0
Fax.: +49 (0) 771 83 00 – 80
VAT-No.: DE128240232
WEE-Reg.-Nr.: DE64678500

Headquarter (North America):

Canvys
A Division of Richardson Electronics GmbH
40W267 Keslinger Road
PO Box 393
LaFox IL 60147-0393 USA